



sigmas, 3 pass

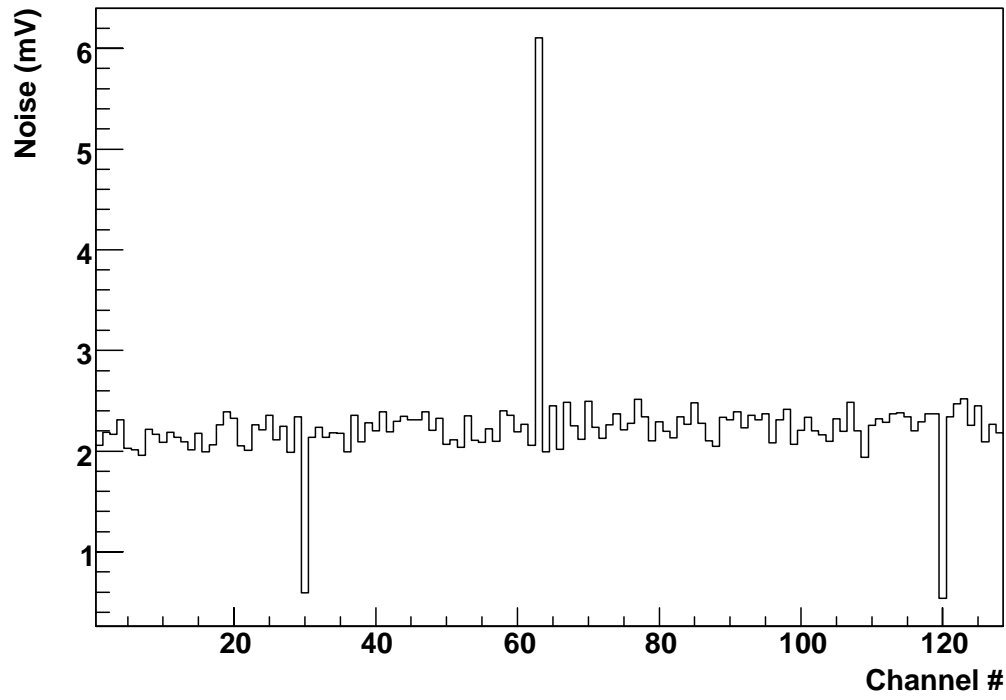


Noise vs. Channel number at the output of the test board (detector not yet connected).

Graph

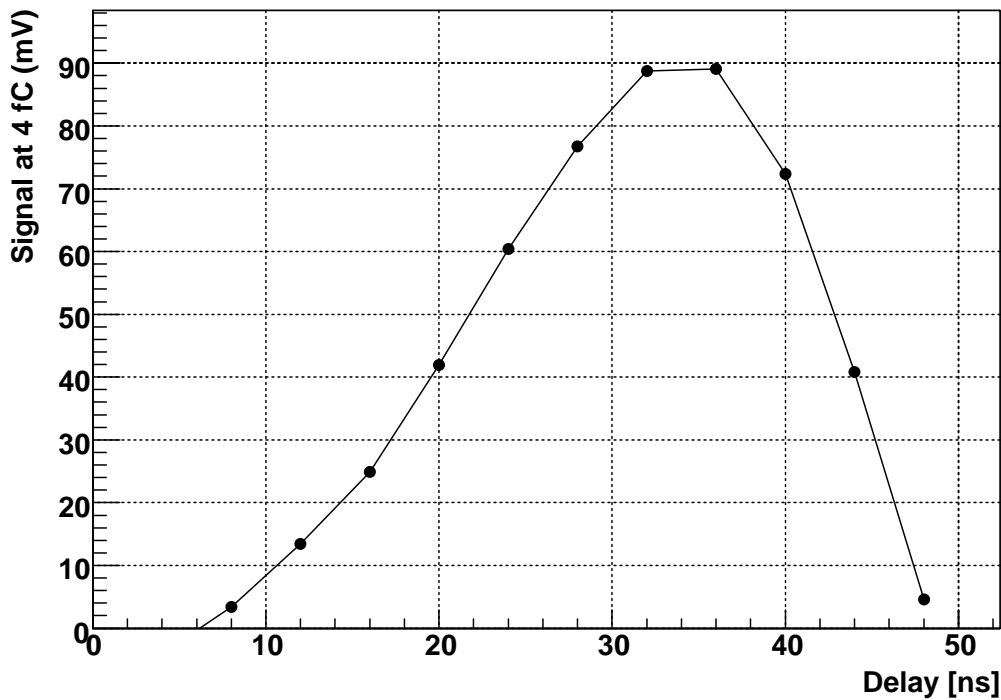

Pulse shape: signal vs. strobe delay for 4 fC calibration pulse

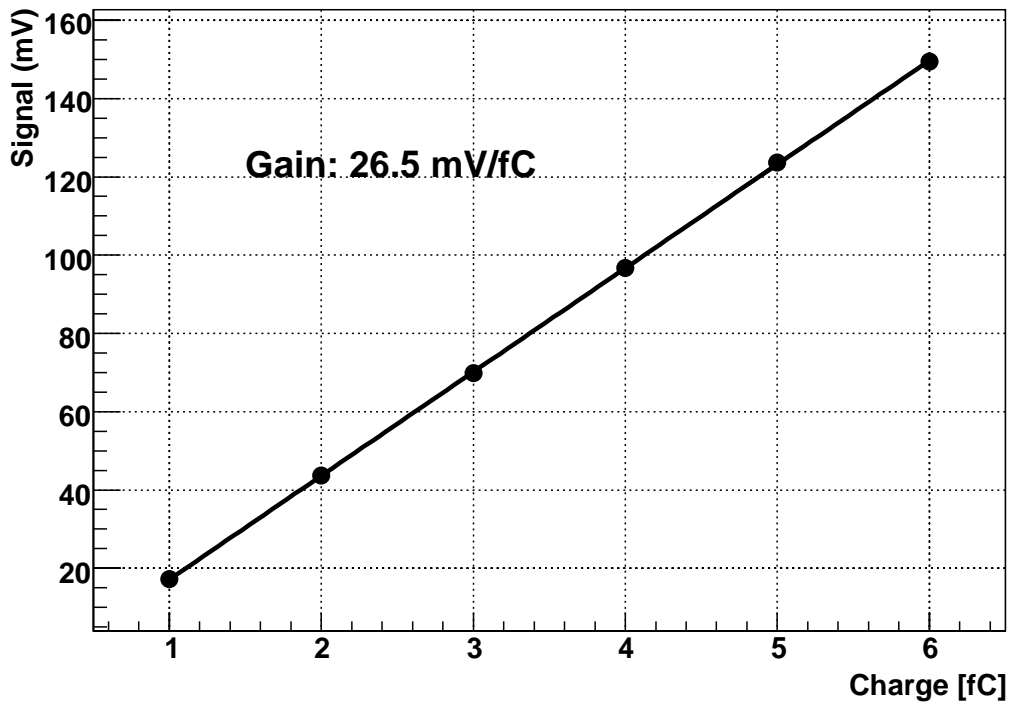

Response curve: average signal at the output of the test board from 32 channels vs. charge from on-chip calibration capacitors.