


# Cable Layout Proposal - B

Date : Nov. 25, 2000

## Cable Layout

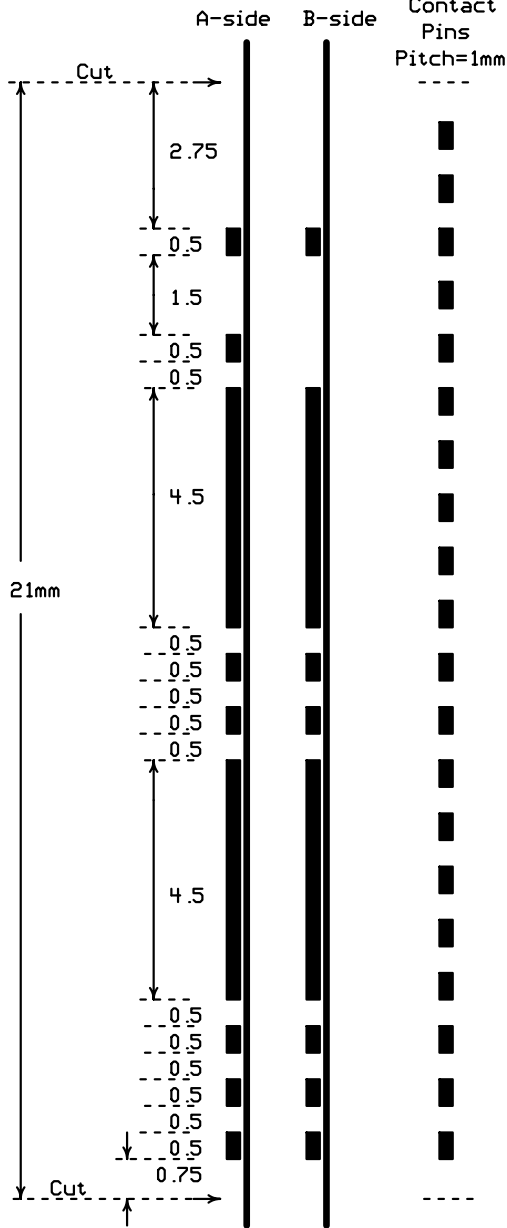

## Pin Assignment (at the Barrell Optoflex)

(changed : NO MORE TEMP\_RET line)

(the FORWARD version does not have TEMP2, either)

Contact Pins  
Pitch=1mm

JA		JB	
1	not used	1	not used
2	not used	2	not used
3	BIAS (AG)	3	BIAS HU
4	not used	4	not used
5	TEMP2 (Barrell)	5	not used
6	AG	6	Vcc
7	AG	7	Vcc
8	AG	8	Vcc
9	AG	9	Vcc
10	AG	10	Vcc
11	AG Sense	11	Vcc Sense
12	DG Sense	12	Vdd Sense
13	DG	13	Vdd
14	DG	14	Vdd
15	DG	15	Vdd
16	DG	16	Vdd
17	DG	17	Vdd
18	TEMP1	18	RESET
19	PIN Bias	19	Select
20	ILEDa	20	ILEDb

## Cable Layout

