


Cable Layout Proposal - A

Date : Feb. 09 2000

Cable Layout

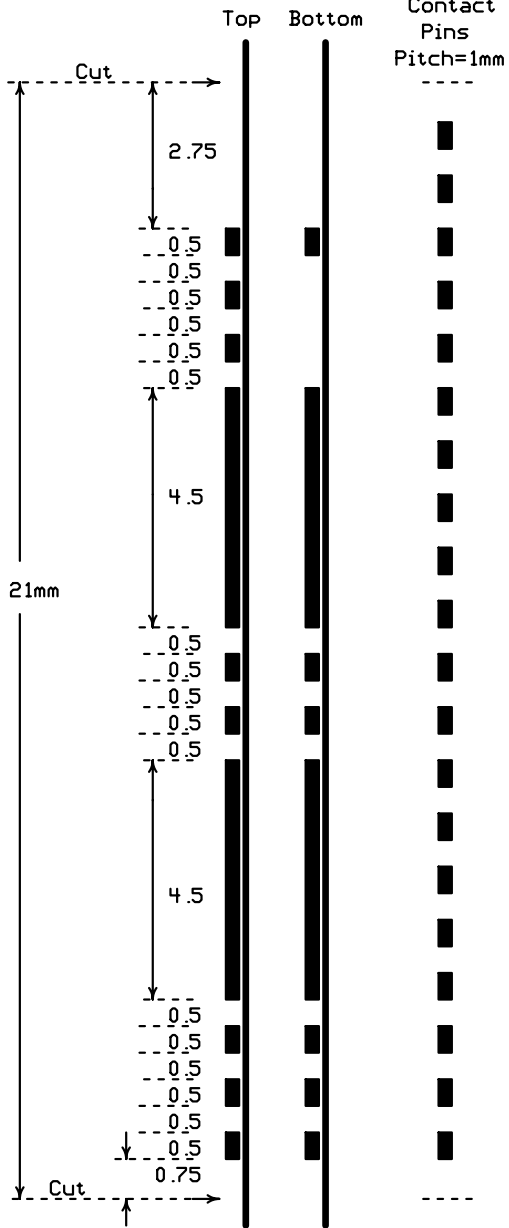

Pin Assignment (at the Barrell Optoflex)

| | JA - TOP | JB - BOTTOM |
|----|---------------|------------------|
| 1 | not used | 1 not used |
| 2 | not used | 2 not used |
| 3 | BIAS (AG) | 3 BIAS HV |
| 4 | TEMP_RET (??) | 4 not used |
| 5 | TEMP2 (?) | 5 not used |
| 6 | AG | 6 Vcc |
| 7 | AG | 7 Vcc |
| 8 | AG | 8 Vcc |
| 9 | AG | 9 Vcc |
| 10 | AG | 10 Vcc |
| 11 | AG Sense | 11 Vcc Sense |
| 12 | DG Sense | 12 Vdd Sense |
| 13 | DG | 13 Vdd |
| 14 | DG | 14 Vdd |
| 15 | DG | 15 Vdd |
| 16 | DG | 16 Vdd |
| 17 | DG | 17 Vdd |
| 18 | TEMP1 | 18 TEMP2 / RESET |
| 19 | PIN Bias | 19 Select |
| 20 | ILEDa | 20 ILEDb |

Cable Layout

